

Silent Gliss order form for Bent Tracks


We can advise on sources for a more professional measuring tool for angles www.buybrandtools.com **Enter Customer Name Enter track Type** Delivery address if non standard **Enter Colour Enter Track Length in mm** If Metropole enter Std or finial / Midial *Installation Height Enter Operation side LH, RH, Both Enter face for face fix If both intermediate pulley added chargeably Enter top for top fix, or special for extension If top fix please state projection to back of track Enter projection required Enter Stacking LH, RH, Pair Enter cord drop For metropole Black cord (standard) White cord If wave 3840/5400/6120/6130/6140 80mm 60mm **Enhanced Wave** Option 1 Option 2 Option 3 None 2255 Adjustable Brake 2255 Adjustable Brake & Enhanced Wave (80mm Only) 6366 Carrier Please note angles and facets strongly preferred, cross measurements are generally inaccurate and may cause delays in providing your order 1 Bend Bay with 1 Return bends 2 Bend Bay with 2 Return bends В Α С Α LH LH RH Wall or B= Facet Lengths A= Facet Lengths A= RH LH Return Return Return LH RH Angles 1= Angles 3 Bend Bay with 2 Return bends 4 Bend Bay with 2 Return bends В D В С Е Α Α 5 LH RH LH RH Wall or Wall or Facet Lengths A= B= Facet Lengths Returns LH= RH= F= Return Return Return Return Angles 1= **Angles** 1=

LH Return

RH Return


LH Return

RH Return

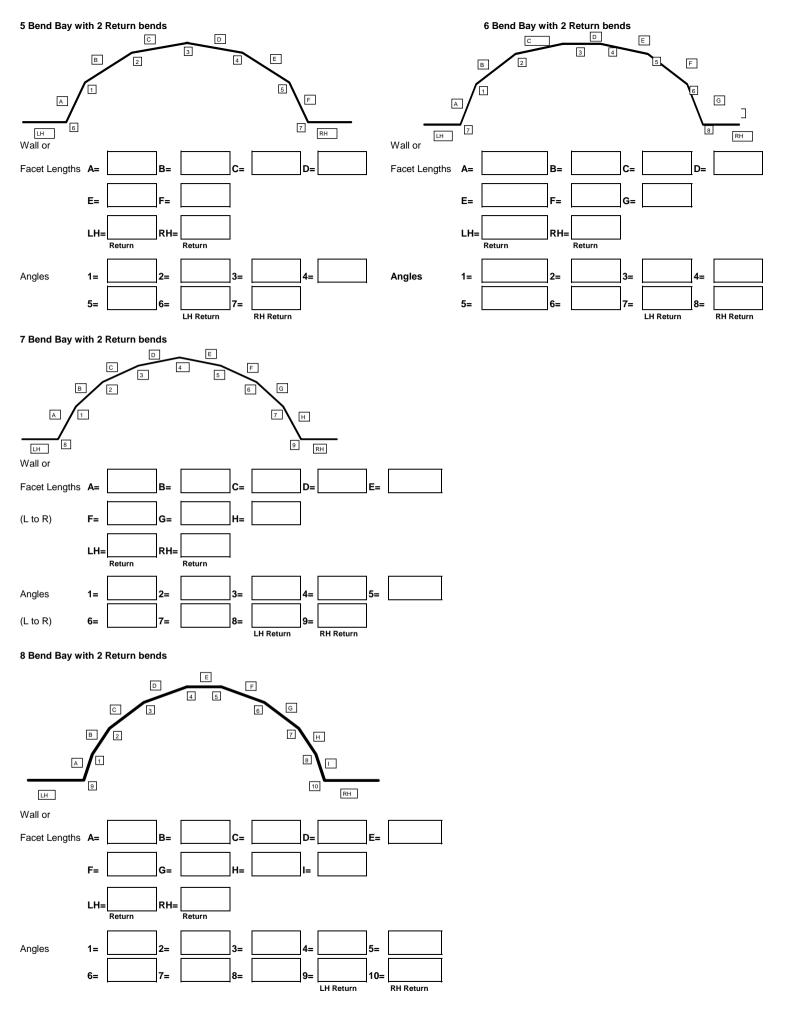


Example of a protractor below, available from Silent Gliss please email info@silentgliss.co.uk to request


EXAMPLE

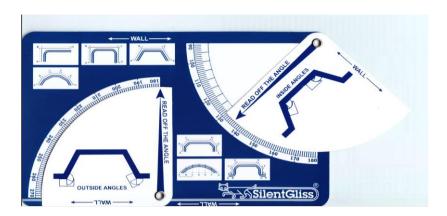

Angles and facets (wall dimensions) strongly preferred, protractors are available free of charge from Silent Gliss We can also advise on sources for a more professional measuring tool for angles www.buybrandtools.com Before providing information in the following way, please consider if angles and facets can be provided instead.

Example

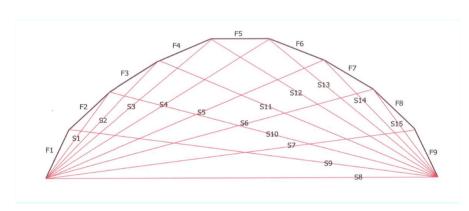

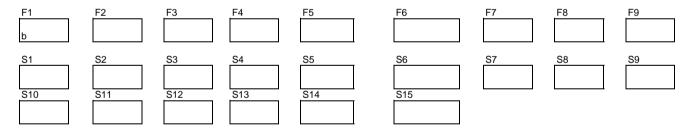

For a 4 sided bay complete F1 to F4 and S1 to S5

For a 5 sided bay complete F1 to F5 and S1 to S7

For a 6 sided bay complete F1 to F6 and S1 to S9 For a 7 sided bay F1 to F7 and S1 to S11

For an 8 sided bay complete F1 to F8 and S1 to S13

For a 9 sided bay complete as per example

* If Installation Height is known, cord drops will comply with EN13120

Child Safety Legislation - EN 13120

| Operating Loop for Child Safety Device (Only applicable to 3840, 6120, 6140 supplied with Silent Gliss Colorama Wave Curtains) | |
|--|--|
| Installation Height | Chain Length |
| Known | Distance from floor to bottom of pull cords shall be at least 0.6m |
| Unknown | Less than or equal to 2/3rd drop of the blind |

| Operating Loop for Cord Retainer | |
|----------------------------------|---|
| Installation Height | Cord Length |
| Known | Distance from floor to bottom of operating chain shall be at least 1.5m |
| Not Known drop ≤ 2.5m | Length of operating chain loop shall be ≤ 1m |
| Not Known drop > 2.5m | Shall be ≤ drop of blind less 1.5m |